


## ALUFIX® EVO

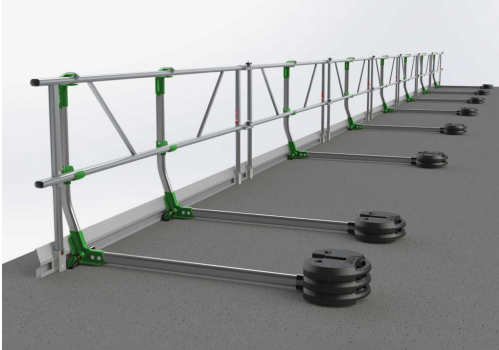

Temporary guardrail made of strong aluminium profiles with a max. support gap of 2.8 m, can also be used with edging board on flat roofs without parapet, up to max. 10° pitch

ALUFIX® EVO is used as a temporary protective structure for work on roofs and is therefore ideal for use on new builds and renovations of buildings in which scaffolding cannot be erected. It can be used on roofs with max. 10° pitch on which there is a drop of at least 3 m (according to the "Construction Work" accident prevention regulations) up to max. 100 m. ALUFIX® EVO is available for roof surfaces with a parapet < 150 mm, and for roof surfaces with a parapet > 150 mm or no parapet. ALUFIX® EVO consists of strong aluminium profiles that make it particularly hard-wearing. The spacing between the support elements is 2.8m. Can also be supplied with transport box (for max. 36.4 m guardrail) with crane eye bolt and mechanism for loading by forklift ALUFIX® EVO can be used as follows:

- without edging board on flat roof with parapet > 150 mm
- with edging board on flat roof without parapet or parapet < 150 mm