


EAP VARIANT VA

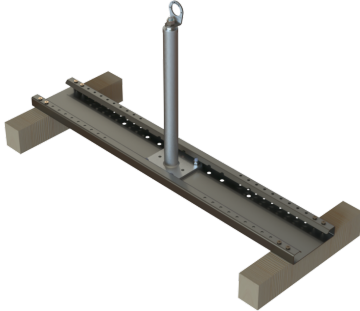

Stainless steel anchorage point, including steep roof rail for bolting to wooden beams including rotating eye bolt

Requirements of subsurface:

- Rafters min. 80 x 100 mm
- Rafter spacing min. 435 to max. 1065 mm

Mounting materials: Mounting kit item no. 4891 8000

- 8 x wood screw 8 x 220mm, Torx 40 (other length on request)
- 4 x hex bolt M12x35
- 4 x locking nut M12
- 4 x washer M12

Standards / Approval / Number of users:

- DIN EN 795:1996 Type A
- prEN 795:2009

| Support height | For roof height | Item no. |
|----------------|-----------------|-----------|
| 300 mm | up to 150 mm | 4850 1300 |
| 400 mm | up to 250 mm | 4850 1400 |
| 500 mm | up to 350 mm | 4850 1500 |