


SYS SAFEX TR Z

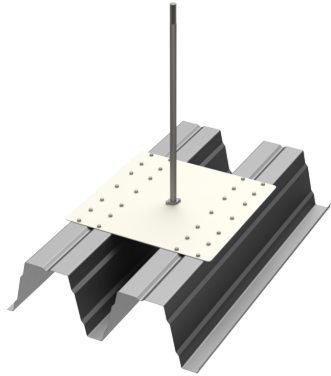

System support for intermediate holder in the GREENLINE lifeline system.

Mounting substrate:

- steel trapezoidal profile (at least 85mm high, at least 0,75mm thick)

Fixing:

- 28 pieces stainless steel drilling screws (included in delivery)

Dimension:

- Ø 16 mm x Bauhöhe, max. Überstand Dachaufbau: 300 mm

Approval:

- general building authority approval according to DIBt

Certificate:

- according to EN 795:2012 Type A, CEN/TS 16415:2017

Installation:

- according to enclosed installation instructions

Variants:

Article number	Designation	Height
46162301	GRÜN SYS SAFEX TR Z 300	300 mm
46162401	GRÜN SYS SAFEX TR Z 400	400 mm
46162501	GRÜN SYS SAFEX TR Z 500	500 mm
46162601	GRÜN SYS SAFEX TR Z 600	600 mm

Customised support heights up to max. 1000 mm available.