


TopGRÜN

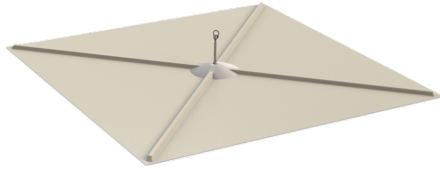

Load-bearing anchor system for use as a single anchorage point, without penetration of the roof sealing, weighting with bulk material, can be used on flat roofs up to max. 5° inclination, parapet height min. 50 mm from top of gravel/substrate.

Approvals:

EN 795:2012 type E for 2 persons (incl. 1 first aider)
PPE regulation (EU) 2016/425

Technical specifications:

Construction height:	350 mm
Thread:	M16
Dimension:	3.000 x 3.000 mm
Material:	stainless steel A2/geotextile
Load material	gravel (1.600 kg/m ³) substrate (1.100 kg/m ³)
Surface load	min. 80 kg/m ³

(Delivery without bulk material!)