

# Melixon-S



①



②




③









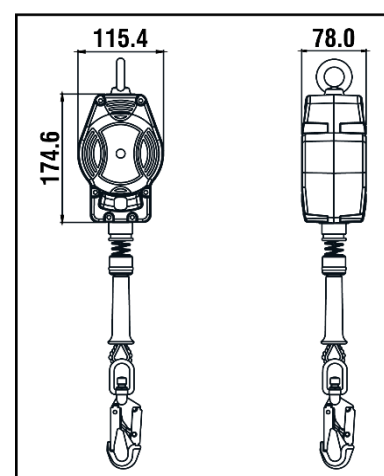

④




140  
kg




HS CODE
84798997
CARTON SIZE / PCS.
60 x 40 x 24 cm / 7
AET N°2777/10829-03/E08-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D F14/14003.01
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16080-01/E02-01
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom


REF.	FA 20 402 03
LG.  KG	3,50 m
CE	EN 360:2002
MAT. 	Polyamide 6 - 30% fiber glass  STEEL $\varnothing$ 4.8 mm
	 FA 50 225 23B / FA 50 203 20 with fall indicator
	x2
R(kN)	12 kN
	YES
+	PPE-R 11.060
	3.13 KG

LG.  
  
KG

**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

MAT.  



**Matière carter / câble**  
Material of casing / wire rope  
**Material cárter / cable**  
Material dei carter / cavo  
**Material Gehäuse / Seil**



**Matière connecteur haut / connecteur bas**  
Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Nombre d'émerillons**  
Number of swivels  
**Cantidad de eslabones giratorios**  
Numero di tornichetti  
**Anzahl der Wirbel**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**